SL 380 Outdoor High Lifter

for indoor and outdoor use



signed for jobs that require additional reach and lifting height. The High Lifter easily handles jobs across basement shafts and flower beds and replacement of windows in end walls etc.

The long arms of the lifting device easily reach heights where panes have be transported across e.g. fences.

• Two vacuum circuits with two pumps

 Off road with front-wheel drive and big wheels with electronic brake

- · Manoevrable with dual rear wheels
- Lifting height 2800 mm (centre of yoke)
- Ergonomic operation handle
- Waterproof according to ip65
- Foam filled tyres

The long arm reaches easily across obstacles such as basement shafts, flower beds etc.



The Smartlift is easily transported in a van or on a trailer


N.A. Christensensvej 39 DK-7900 Nykøbing Mors Tel.: +45 9772 2911

E-mail: smart@smartlift.dk


www.smartlift.dk



SL 380 Outdoor High Lifter

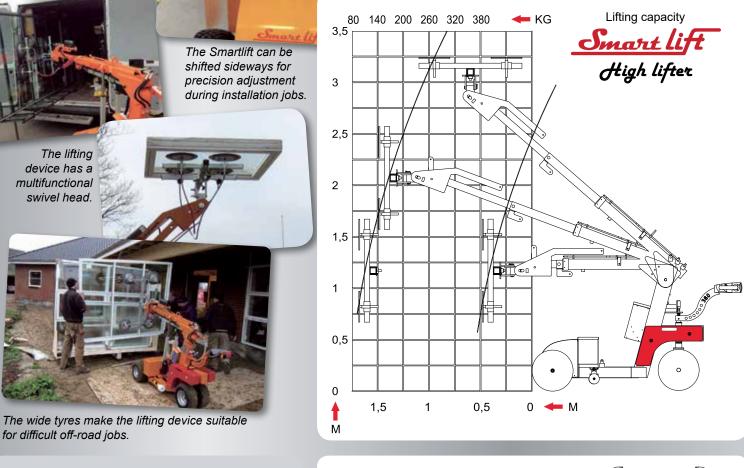

Technical data	
Description	Value
Weight	680 kg
Height	1350 mm
Width (min)	820 mm
Length (min)	2200 mm
Extension of arm	600 + 600 mm
Tip from horizontal	45° back og 90° forward
Speedregulation	Stepless high/low
Sideshift	100 mm
Vacuum system	2-circuits
Lifting height	3200 mm
Chargingvoltage	230 volt
Integrated charger	Victron Energy
Chargingtime	Approx 8 hours
Battery (2 x 12v) 24 volt	2 x 105 A
Runningperiod	Approx 30 hours
Front-wheel drive	1200 Watt - AC
Brake	Elektronisk
Suction pads	4 unit Ø 300 mm
Automatic suction	2 vacuum pumps
Lifting capacity arm in/extended (1200 mm)	380 kg/100 kg

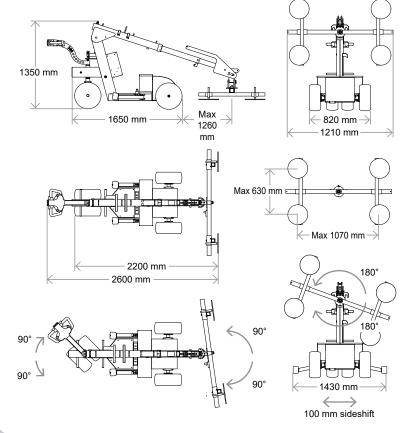

N.A. Christensensvej 39 DK-7900 Nykøbing Mors Tel.: +45 97722911

E-mail: smart@smartlift.dk

www.smartlift.dk

